




AVK 10 BLUE – 304151

Description

General Product Information	Insulating material	PA
	Inflammability class acc. to UL 94	V2
	Packing Unit	100
	Weight (g)	
Dimensions	Width	10 mm
	Length	44.2 mm
	Height (MR 32)	— mm
	Height (MR 35×7.5)	44.5 mm
TSE / CE Technical Data	Nominal Voltage	630 V ~
	Nominal Current	57 A
	Cross Section	10 mm ²
	Norm	EN 60947-7-1
VDE Technical Data	Nominal Voltage	630 V ~
	Nominal Current	57 A
	Cross Section	10 mm ²
	VDE Norm	IEC 60947-7-1
UL / CSA Technical Data	Nominal Voltage	600 V ~
	Nominal Current	65 A
	Cross Section	AWG/16-6
ATEX Technical Data	Nominal Voltage	500 V ~
	Nominal Current	50 A
	Cross Section	6
Connection Data	Minimum solid strand cross section	1.5 mm ²
	Maximum solid Strand cross section	16 mm ²
	Minimum fine Strand cross section	1.5 mm ²
	Maximum fine strand cross section	10 mm ²

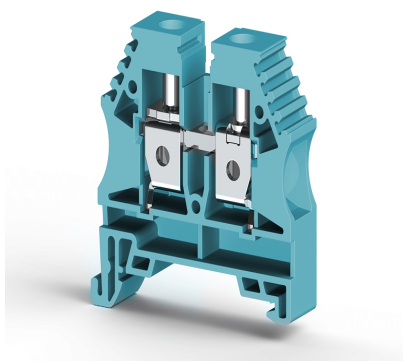

AWG Conductor Range	16-6
Connection Type	screw/vidal?
Insulation Stripping length	12 mm
Tightening torque	1.2 Nm