




AVK 16 BLUE – 304161

Description

General Product Information	Insulating material	PA
	Inflammability class acc. to UL 94	V2
	Packing Unit	50
	Weight (g)	
Dimensions	Width	12 mm
	Length	50.0 mm
	Height (MR 32)	— mm
	Height (MR 35×7.5)	55.5 mm
TSE / CE Technical Data	Nominal Voltage	750 V ~
	Nominal Current	76 A
	Cross Section	16 mm ²
	Norm	EN 60947-7-1
VDE Technical Data	Nominal Voltage	750 V ~
	Nominal Current	76 A
	Cross Section	16 mm ²
	VDE Norm	IEC 60947-7-1
UL / CSA Technical Data	Nominal Voltage	600 V ~
	Nominal Current	85 A
	Cross Section	AWG/12-4
ATEX Technical Data	Nominal Voltage	630 V ~
	Nominal Current	66 A
	Cross Section	10
Connection Data	Minimum solid strand cross section	1.5 mm ²
	Maximum solid Strand cross section	16 mm ²
	Minimum fine Strand cross section	1.5 mm ²
	Maximum fine strand cross section	16 mm ²

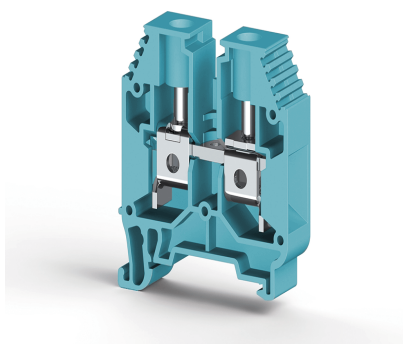

AWG Conductor Range	12-4
Connection Type	screw/vidal?
Insulation Stripping length	12 mm
Tightening torque	1.2 Nm