




AVK 16T RD – 334200

Description

General Product Information	Insulating material	PA
	Inflammability class acc. to UL 94	V2
	Packing Unit	50
	Weight (g)	—
	Continuous Operating Temp.	(min.-max.)
Dimensions	DIN-EN 45545Z	
	Width	12 mm
	Length	52.80 mm
	Height (MR 32)	— mm
	Height (MR 35×7.5)	58.70 mm
TSE / CE Technical Data	Nominal Voltage	— V ~
	Nominal Current	— A
	Cross Section	16 mm ²
	Norm	EN 60947-7-2
VDE Technical Data	Nominal Voltage	— V ~
	Nominal Current	— A
	Cross Section	— mm ²
	VDE Norm	IEC 60947-7-1/IEC60947-7-2
UL / CSA Technical Data	Nominal Voltage	— V ~
	Nominal Current	— A
	Cross Section	AWG/12-4
Connection Data	Minimum solid strand cross section	1.5 mm ²
	Maximum solid Strand cross section	25 mm ²
	Minimum fine Strand cross section	1.5 mm ²
	Maximum fine strand cross section	25 mm ²
	AWG Conductor Range	12-4

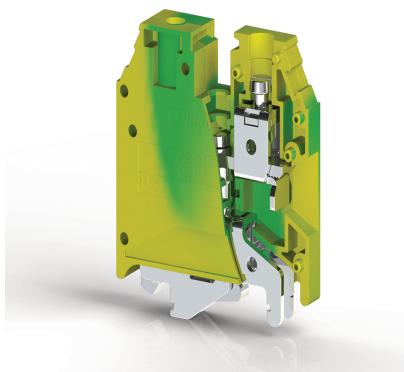

Connection Type	14
Insulation Stripping length	1.2/2.0 mm