




AVK 2,5/4T – 334120

Description

General Product Information	Insulating material	PA
	Inflammability class acc. to UL 94	V2
	Packing Unit	—
	Weight (g)	—
	Continuous Operating Temp.	(min.-max.)
Dimensions	DIN-EN 45545Z	
	Width	6 mm
	Length	42.00 mm
	Height (MR 32)	— mm
	Height (MR 35×7.5)	44.50 mm
TSE / CE Technical Data	Nominal Voltage	— V ~
	Nominal Current	— A
	Cross Section	4 mm ²
	Norm	EN 60947-7-2
VDE Technical Data	Nominal Voltage	— V ~
	Nominal Current	— A
	Cross Section	4 mm ²
	VDE Norm	EN 60947-7-1/EN 60947-7-2
UL / CSA Technical Data	Nominal Voltage	— V ~
	Nominal Current	— A
	Cross Section	4
Connection Data	Minimum solid strand cross section	0.5 mm ²
	Maximum solid Strand cross section	6 mm ²
	Minimum fine Strand cross section	0.5 mm ²
	Maximum fine strand cross section	6 mm ²
	AWG Conductor Range	20-10

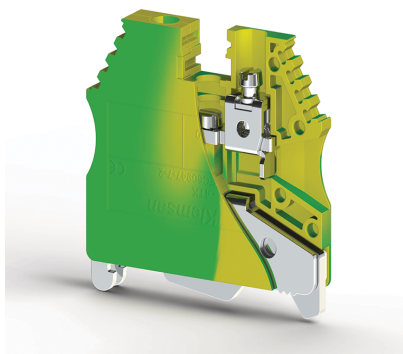

Connection Type	screw/vidal?
Insulation Stripping length	10 mm