




AVK 50T – 334190

Description

General Product Information	Insulating material	PA
	Inflammability class acc. to UL 94	V2
	Packing Unit	10
	Weight (g)	
Dimensions	Width	20 mm
	Length	80.00 mm
	Height (MR 32)	— mm
	Height (MR 35×7.5)	77.00 mm
TSE / CE Technical Data	Nominal Voltage	— V ~
	Nominal Current	— A
	Cross Section	50 mm ²
	Norm	EN 60947-7-2
VDE Technical Data	Nominal Voltage	— V ~
	Nominal Current	— A
	Cross Section	20 mm ²
	VDE Norm	IEC 60947-7-1/IEC60947-7-2
UL / CSA Technical Data	Nominal Voltage	— V ~
	Nominal Current	— A
	Cross Section	AWG 6-1/0
Connection Data	Minimum solid strand cross section	16 mm ²
	Maximum solid Strand cross section	70 mm ²
	Minimum fine Strand cross section	25 mm ²
	Maximum fine strand cross section	50 mm ²
	AWG Conductor Range	6-0/16-50
	Connection Type	screw/widal?

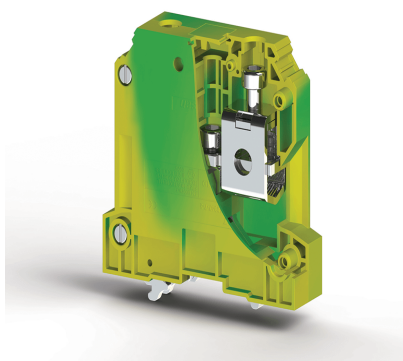

Insulation Stripping length

24 mm