




AVK 6 BLUE – 304141

Description

General Product Information	Insulating material	PA
	Inflammability class acc. to UL 94	V2
	Packing Unit	100
	Weight (g)	
Dimensions	Width	8 mm
	Length	44.2 mm
	Height (MR 32)	— mm
	Height (MR 35×7.5)	44.5 mm
TSE / CE Technical Data	Nominal Voltage	630 V ~
	Nominal Current	41 A
	Cross Section	6 mm ²
	Norm	EN 60947-7-1
VDE Technical Data	Nominal Voltage	630 V ~
	Nominal Current	23 A
	Cross Section	6 mm ²
	VDE Norm	IEC 60947-7-1
UL / CSA Technical Data	Nominal Voltage	600 V ~
	Nominal Current	50 A
	Cross Section	AWG/26-8
ATEX Technical Data	Nominal Voltage	630 V ~
	Nominal Current	36 A
	Cross Section	6
Connection Data	Minimum solid strand cross section	0.5 mm ²
	Maximum solid Strand cross section	10 mm ²
	Minimum fine Strand cross section	1.5 mm ²
	Maximum fine strand cross section	6 mm ²

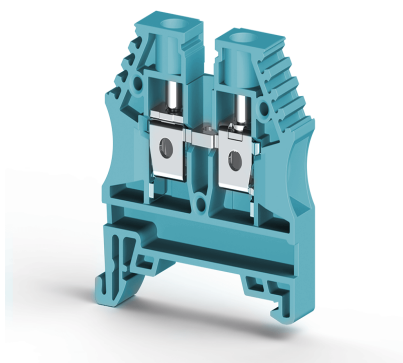

AWG Conductor Range	26-8
Connection Type	screw/vidal?
Insulation Stripping length	12 mm
Tightening torque	0.8 Nm