




PIK 10N GREY – 319909

Description

General Product Information	Insulating material	PA
	Inflammability class acc. to UL 94	V2
	Packing Unit	20
	Weight (g)	—
Dimensions	Width	10 mm
	Length	77.90 mm
	Height (MR 32)	— mm
	Height (MR 35×7.5)	73.00 mm
TSE / CE Technical Data	Nominal Voltage	800 V ~
	Nominal Current	57 A
	Cross Section	10 mm ²
	Norm	EN 60947-7-1
VDE Technical Data	Nominal Voltage	— V ~
	Nominal Current	— A
	Cross Section	10 mm ²
	VDE Norm	—
UL / CSA Technical Data	Nominal Voltage	— V ~
	Nominal Current	— A
	Cross Section	10
ATEX Technical Data	Nominal Voltage	— V ~
	Nominal Current	— A
	Cross Section	10
Connection Data	Minimum solid strand cross section	1.5 mm ²
	Maximum solid Strand cross section	16 mm ²
	Minimum fine Strand cross section	1.5 mm ²
	Maximum fine strand cross section	16 mm ²

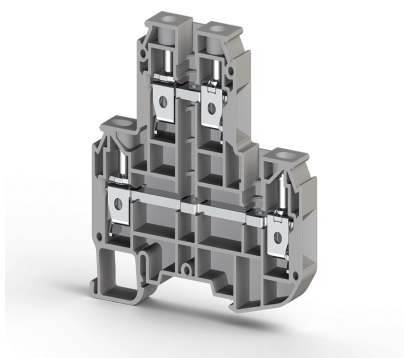

AWG Conductor Range	18-6
Connection Type	screw/vidal?
Insulation Stripping length	12 mm
Tightening torque	1.2/1.8 Nm